

SS1 Electrical Enclosure

IP-304-1408040

STAINLESS STEEL | SINGLE DOOR | IP66

1400H x 800W x 400D

IP Enclosures SS1 Range of grade 304/304L
Stainless Steel electrical enclosures are suitable for general industrial applications.

Protection: P66 IK10, NEMA 4x (Independent accredited test laboratory)

Standard: IEC62208, IEC/EN/AS60529
(IEC/EN/AS61439 Compliant, Optional UL508A) **CE UK CA**

Material:

- Body: 1.5mm Grade 304/304L Stainless Steel
- Door: 1.5mm Grade 304/304L Stainless Steel
- Device Mounting Plate: 1.5mm galvanised steel sheet
- Seal: Polyurethane

Surface Finish: 0.4 micron Ra surface brushed finish

Body: The robust monoblock body is fabricated using 1.5mm Grade 304/304L Stainless Steel. Flat face sealing surfaces are provided to increase seal life. Pre-fitted blind nuts are incorporated to accommodate mounts and accessory fasteners to eliminate drilling and retain IP rating. Integral device plate mounts and M6 earth stud is provided.


Door: The robust surface mounted door is fabricated using 1.5mm Grade 304/304L Stainless Steel and incorporates concealed removable hinges with captive pins. The door is designed for a 110° opening. Each door contains integral cable management rail studs, M6 earth stud.

Seal: A high quality machine-applied full perimeter UL listed Polyurethane seal foamed in place (FIP) provides excellent sealing over a long life. Temperature resistance -40°C to 80°C (160°C short term loading).

Gland Plate: Gland plates are provided with gaskets and fasteners.


Lock: 3 point lock with keyed swing handle.

Device Mounting Plate: The device mounting plate is fabricated using 1.5mm galvanised steel sheet, pressed to provide additional strength and supplied pre-fitted into enclosure as standard.

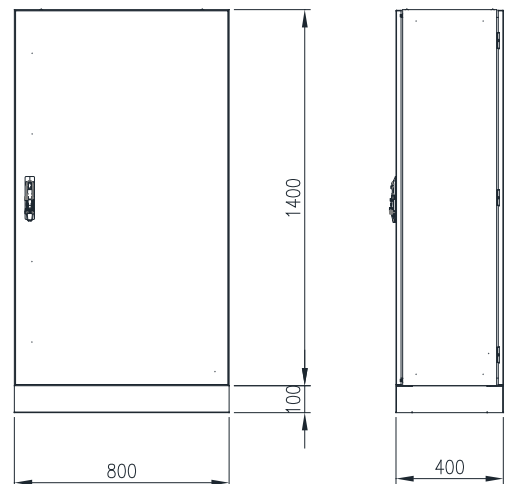

FRONT VIEW

SIDE VIEW



BOTTOM VIEW

